



Section 1:10@A3

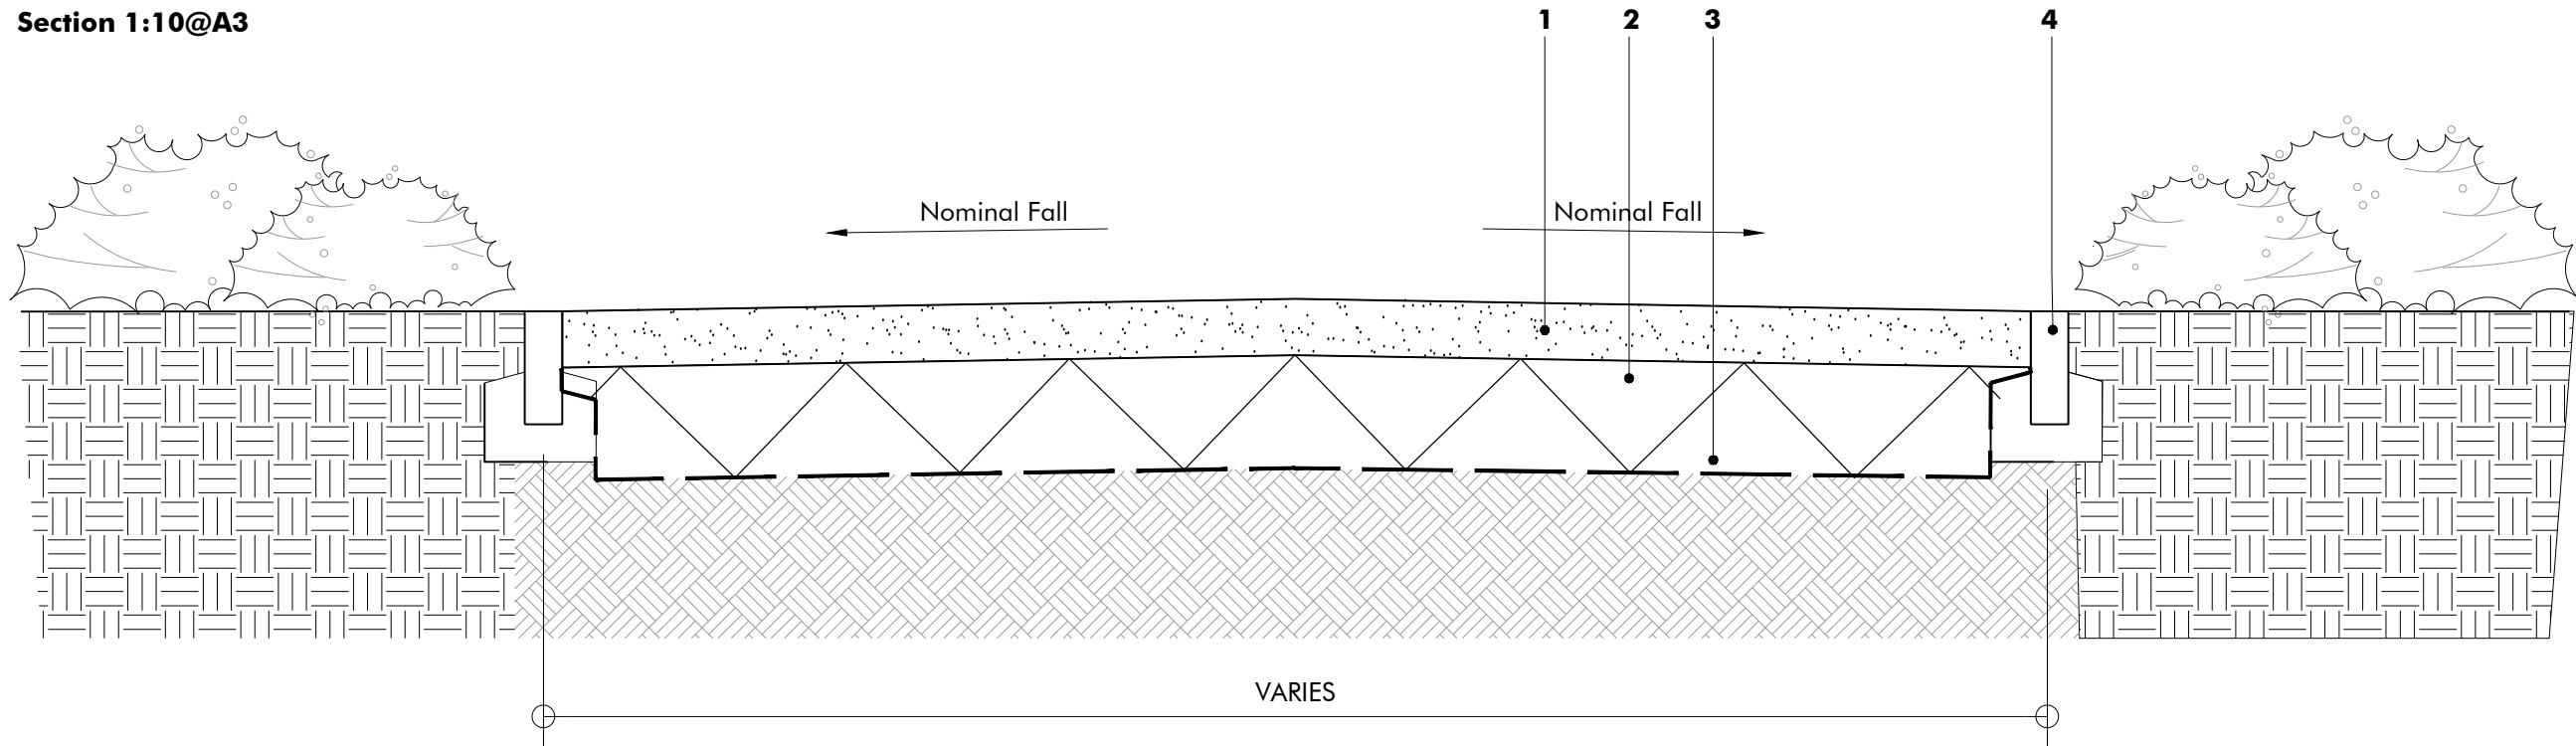

Gravel / Asphalt Interface 1:10@A3

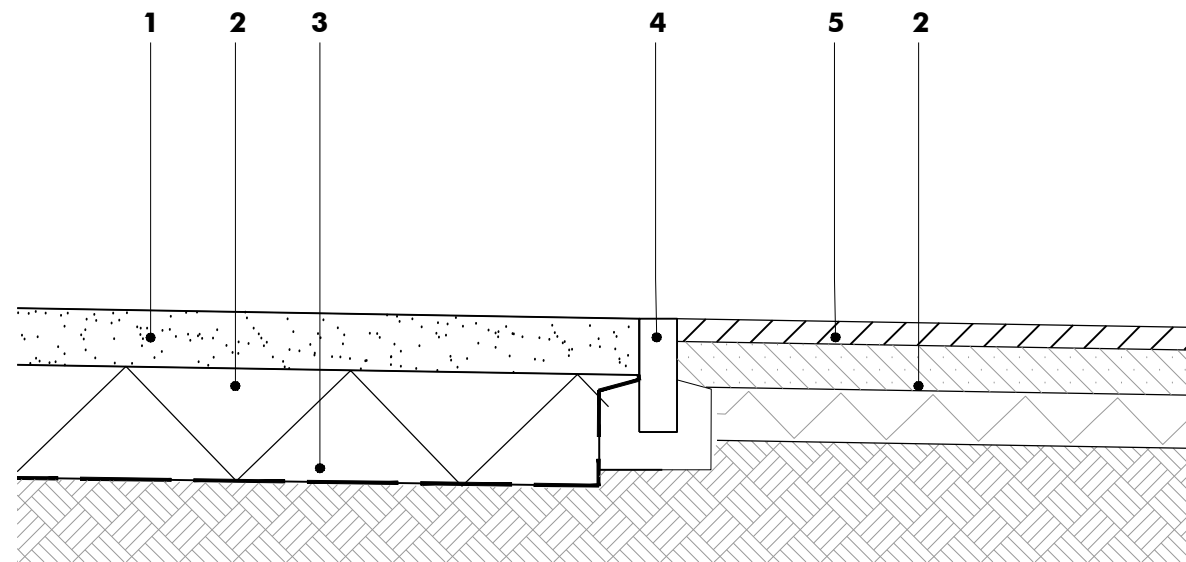

Key

1. 75mm crushed limestone 6mm to dust.
To avoid ponding, path to be laid to 1:60 camber to allow drainage onto soft verges.
2. Sub base
3. Geotextile.
4. Pin kerb edging 50mm x 150mm concrete pin kerb laid in a insitu concrete foundation
5. Wearing Course
Buff coloured hot rolled asphalt.

Notes

- A. All details to be read in conjunction with the General Arrangement plans and specifications.

Revision	Description	Drawn by	Checked by	Date				
-	Issued for Phase 1BN draft	JR	JP	25.07.16				
A	Phase 1BN RMA Submission	JR	GG	03.03.17				
B	Phase 1BN RMA Submission	JR	GG	27.03.17				

		0m 0.5m			
project	Brent Cross Cricklewood Brent Riverside Park	drawn by	JR		
status	Phase 1BN RMA Submission	checked by	JP		
title	Typical Surface Material Consolidated Gravel	date	25.07.16		
Xref	-	scale	1:10@A3		
drawing No	1065-03-445	revision	B		

Macgregor • Smith
Landscape Architecture

